


Installation Instructions

1) Hardware and parts list :


| NO. | Item | Photo | QTY | NO. | Item | Photo | QTY |
|-----|---------------------|---|-------|-----|---|---|-------|
| 1. | Mounting Brackets |  | 2pcs | 2. | Center Couple (one longer, two shorter) |  | 3pcs |
| 3. | Support Arm |  | 2pcs | 4. | Upper & Lower Support Arm |  | 2pcs |
| 5. | Bushing |  | 4pcs | 6. | Big screws, Flat Washer, Hex Cap Bolt |  | 16pcs |
| 7. | Black Dome Caps |  | 18pcs | 8. | Screw Connector |  | 2pcs |
| 9. | Self tapping screws |  | 18pcs | 10 | Big Caps |  | 4pcs |

2) Installation Steps:

Step 1: Connect the Support Arm and two Bushings to the Mounting Brackets, using Hex Cap Bolt, Flat Washers, Big screws and Screw Connector, as shown in the below picture. Then Slide the Mounting Brackets to the left and right sides of the spa.

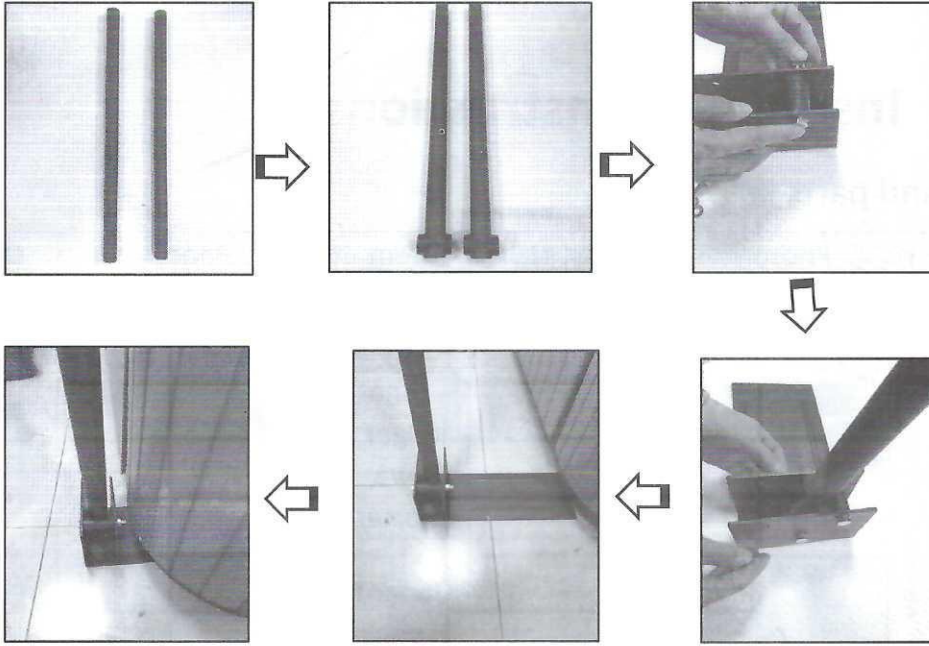

Step 2: Insert the upper&lower support arm into the center couple piece. Then slide it into the support arm which already connected with mounting bracket. Then press the decorative Small Black Dome Caps over the heads of all the exposed screws. Note: the 3pcs center couples are used singly or in combination to small spas and big spas(Spas' size from 1.5 m to 2.5 m).

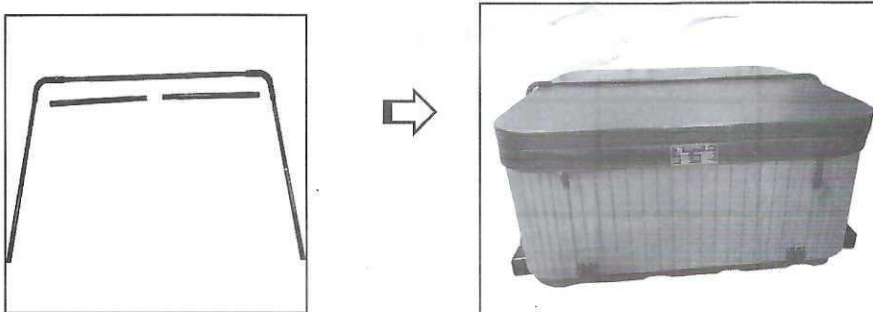

Step 3:

Lay the Cover Lift on the spa cover. using the Self Tapping Screws to fasten the Support Arms and Coupler Pieces together. Slide the folded cover into support arms , Finally push the cover down and the cover storing neatly out of the way.

